


WUXI COOLMAXX MACHINERY TECHNOLOGY CO.,LTD

Contact:Ms.Ace
Mail:manager@coolmax.cc

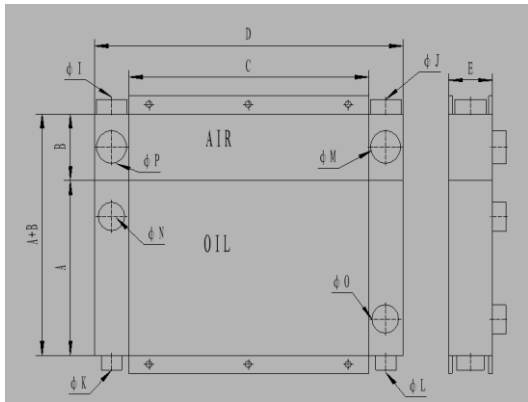

Model No.	CMCP001	CMCP002	CMCP003	CMCP004	CMCP005	CMCP006	CMCP007	CMCP008
Total Power (kW)	4/5.5/7.5	11.0/15.0	18/22	30/37	45/55	75	110	90
Oil Cooling Power (kW)	3.59/4.30/6.00	8.97/11.78	15.33/18.10	24.70/30.00	37.11/45.56	61.82	94	
Air Cooling Power (kW)	1.03/1.38/1.86	2.90/3.89	3.75/4.44	5.94/7.58	10.00/12.49	17	16	
Oil Flow (l/min)	12/15/20	23/28	33/40	45/43	60/67	75	110	125
Air Flow (l/min)	40/53/80	120/160	200/240	330/370	520/610	860	1300	1090
Cooling Air Flow (kg/h)	500/730/1000	1700/2600	2700/3400	4800/7500	5800/8000	11500		14500
Oil Inlet Temp (°C)	Max.100							
Air Inlet Temp (°C)	Max.100							
Environment Temp (°C)	Max.45							
Working Pressure (bar)	15							
Weight (kg)	8	10	14.8	20.5	41	54.5	97	86
A (mm)	241	272	333	486	554	661	764	650
B (mm)	92	107	106	143	183	201	255	300
A+B (mm)	333	379	439	629	737	862	1/9	950
C (mm)	350	400	550	550	700	800	800	850
D (mm)	450	500	650	650	840	940	940	990
E (mm)	63	63	63	63	94	94	140	113
Oil Cooler Connecting Slot(G")	1/2(K+L)	1/2(K+L)	1/2(K+L)	3/4(K+L)	1(N+O)	1-1/4(N+O)	1-1/2(N+O)	1-1/4(N+O)
Air Cooler Connecting Slot(G")	3/4(I+J)	3/4(I+J)	1(I+J)	1(I+J)	1-1/2(I+M)	1-1/2(M+P)	2(M+P)	2(M+P)

Note:If your required parameter is different,please contact us and provide your details.